

RECINTHA® 202

The linearity of the mesh gives this fence a stylish look, while double horizontal wires makes it robust and secure; the system reaches its best when installed with Omega post.

The RECINTHA® 202 maintains high security standards, whilst ensuring a pleasing look.

TECHNICAL DETAILS

Dimensions

- > Mesh 50x200 mm
- > Double wire: 8 mm horizontal, 6mm vertical

Materials

- > S235JR UNI EN 10025
- > Steel

Coating

- > Polyester powder coating
- > Hot dip galvanized to UNI EN ISO 1461

Colours

- > RAL 6005 green, other RAL colours available on demand.

Fixing system

- > Universal MP joint > see page 62
- > Cover plate with security bolts (only with Omega post) > see pages 60-61

Gates


- > Single, double or sliding leaf gates

APPLICATIONS

- > Industrial buildings
- > Residential buildings
- > Parking areas
- > Airports
- > Military sites

PRODUCT SPECIFICATIONS


High-resistance fencing type 202 made of electro-welded wire mesh panels, 50x200 mm opening, with double 8 mm horizontal and 6 mm vertical wires, completed by a symmetrical Omega profile post a predrilled cover plate and secured by stainless steel anti-theft bolts. Painted by thermosetting polyester powder coating.
Post centre-to-centre distance: 2540 mm with Omega post, 2510 mm with square post section.

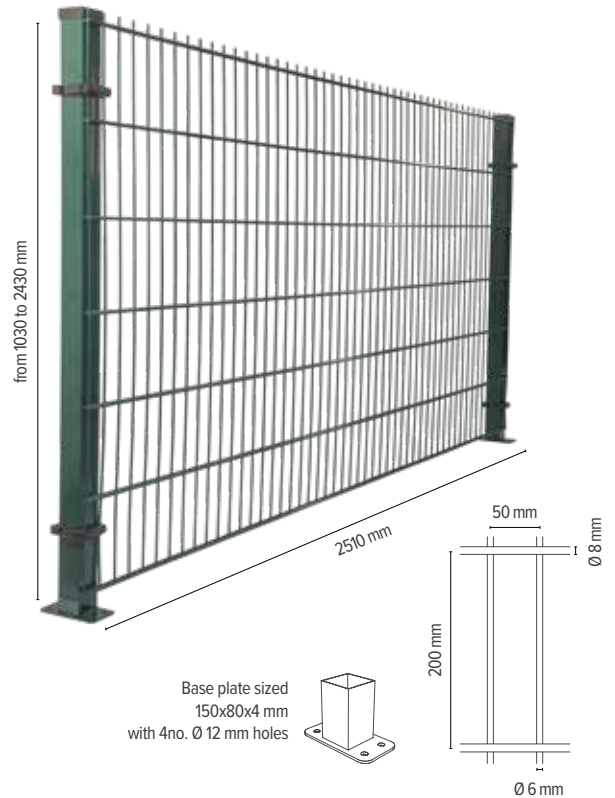

Base plate sized 150x80x4 mm with 4no. Ø 12 mm holes








60x60 mm square post



60x40x25 mm or 120x60x30 mm Omega post



MACS System > see pages 56-57

| |
|---|
|  POSTS P. 60 |
|  ASSEMBLY SYSTEMS P. 62 |
|  CAPS P. 65 |
|  RECINTHA ACCESSORIES® P. 66 |
|  ALARM SYSTEM P. 69 |

| PANEL | | | | POST | | | Post to be set in concrete | | Post with base plate | |
|-------|------|--------|-------|---------------|-------------|---------------|----------------------------|--------------|----------------------|--------------|
| H | L | Weight | | Omega section | Square post | Fixing points | L | Weight galv. | L | Weight galv. |
| mm | mm | kg/ea | kg/m² | mm | mm | n° | mm | kg/ea | mm | kg/ea |
| 1030 | 2510 | 22,5 | 8,7 | 60x40x25 | - | 12 | 1500 | 10,5 | 1080 | 9,9 |
| | | | | - | 60x60 | 3 | 1280 | 3,8 | 1080 | 3,6 |
| 1230 | 2510 | 26,9 | 8,7 | 60x40x25 | - | 12 | 1700 | 12,1 | 1280 | 11,3 |
| | | | | - | 60x60 | 3 | 1480 | 4,4 | 1280 | 4,2 |
| 1430 | 2510 | 31,2 | 8,7 | 60x40x25 | - | 12 | 2000 | 14,2 | 1480 | 12,4 |
| | | | | - | 60x60 | 3 | 1680 | 5,0 | 1480 | 4,8 |
| 1630 | 2510 | 35,6 | 8,7 | 60x40x25 | - | 16 | 2200 | 15,8 | 1680 | 14,0 |
| | | | | - | 60x60 | 4 | 1880 | 5,6 | 1680 | 5,4 |
| 1830 | 2510 | 40,0 | 8,7 | 60x40x25 | - | 16 | 2400 | 17,4 | 1880 | 15,5 |
| | | | | - | 60x60 | 4 | 2080 | 6,2 | 1880 | 6,0 |
| 2030 | 2510 | 44,3 | 8,7 | 60x40x25 | - | 16 | 2600 | 19,0 | 2080 | 17,1 |
| | | | | - | 60x60 | 4 | 2280 | 6,8 | 2080 | 6,6 |
| 2230 | 2510 | 48,7 | 8,7 | 120x60x30 | - | 20 | 2800 | 33,6 | 2080 | 35,1 |
| | | | | - | 60x60 | 4 | 2780 | 8,3 | - | - |
| 2430 | 2510 | 53,1 | 8,7 | 120x60x30 | - | 20 | 3000 | 36,2 | 2480 | 37,8 |
| | | | | - | 60x60 | 4 | 2780 | 8,3 | - | - |

